

PRODUCT CARD 1-2-0294-7563


PLUG.FAN.ASM EC137/80D3G84-B315/100A2-11-Z (WG-315-3.3)



Rated data

Type	EC137/80D3G84-B315/100A2-11-Z	
Phase	3~	
Rated voltage	VAC	400
Rated voltage range	VAC	380 ~ 480
Frequency	Hz	50/60
Speed (rpm)	min-1	4000
Power	W	3300
Current	A	5.1
Minimum ambient temperature	°C	-40
Maximum ambient temperature	°C	40


Performance curve

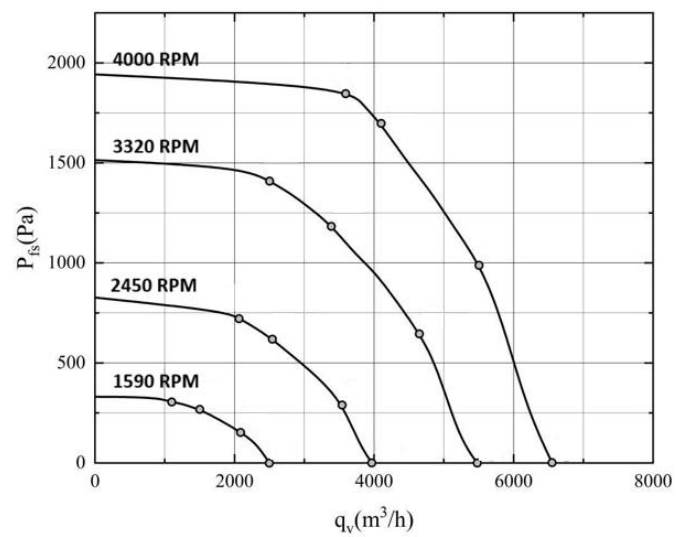


Technical description

Net weight	20kg
Gross weight	23 kg
Housing dimensions	44cm*44cm*42,5cm
Ingress protection	IP54
Installation type	Mounting: horizontal shaft or rotor downwards
Insulation class	F
Storage temperature	-40°C ~ +80°C
Duty	S1
Vibration	≤ 4,6 mm/s
Start-up voltage	1V
Breakdown voltage	DC2500V/1 min
Control characteristics	0-10 VDC / PWM Speed control 0-10 VDC / PWM
	10VDC max. 3,5mA Output terminal +10VDC, max. 3,5 mA
	Integrated PID controller
	Motor overtemperature protection
	Soft start
	RS485 MODBUS-RTU
	Alarm relay
	Protection against voltage/phase failure

Drawing

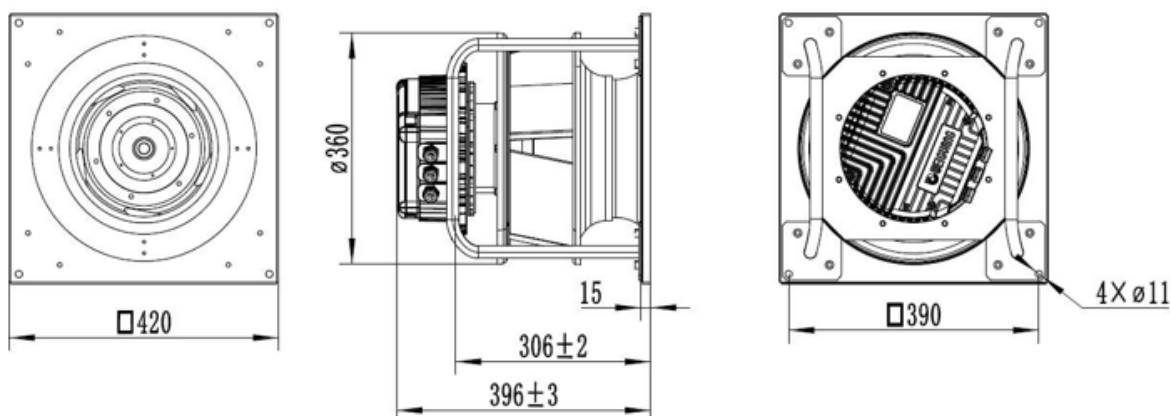

Connections

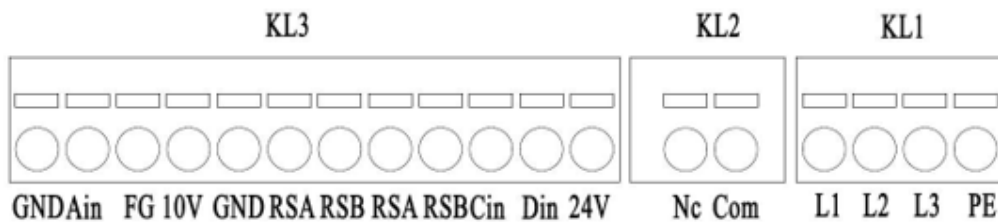

Terminal	No.	Connection	Function
KL1	1	L1	Supply phase conductor; voltage range as shown on the nameplate
	2	L2	Supply phase conductor; voltage range as shown on the nameplate
	3	L3	Supply phase conductor; voltage range as shown on the nameplate
	4	PE	Protective earth
KL2	1	NC	Status relay
	2	COM	Status relay 250VAC/2A (AC1) min.10mA
KL3	1	GND	Reference ground for the control interface
	2	Ain (0-10V/ PWM)	Control input 0-10V lub PWM, internal impedance 100K
	3	FG(Tacho)	Tacho output: 1 pulse per revolution
	4	10V (+10V/ maks.3,5mA)	Output voltage; power supply for an external device
	5	GND	Reference ground for the control interface
	6, 8	RSA	RS485 interface for Modbus, RSA
	7, 9	RSB	RS485 interface for Modbus, RSB
	10	Cin (4-20mA)	Analog input: 4–20 mA (measured), Rin = 124
	11	DIN	Digital input 5-50VDC enables electronics Active: voltage >3VDC; Inactive: voltage <1,5VDC
	12	24V (+24V/ Max. 30mA)	Output voltage; power supply for an external device